

## Laserglow Product Datasheet

### LBD-660 Brightline Pro Cross-Projecting Laser

#### Laserglow Part Number: BCP025205

This model is listed as **inactive** in our product database. Stock may be limited, and availability is subject to change without notice.

#### Similar Products:

For information about the other lasers in this product family visit:

<http://www.laserglow.com/BCP>


#### Ordering:

Order Online Now or Request Quote:

<http://www.laserglow.com/BCP025205>

#### Series Specifications:

|                    |        |
|--------------------|--------|
| Nominal Wavelength | 660 nm |
| Output Type        | CW     |
| Laser Source Type  | Diode  |

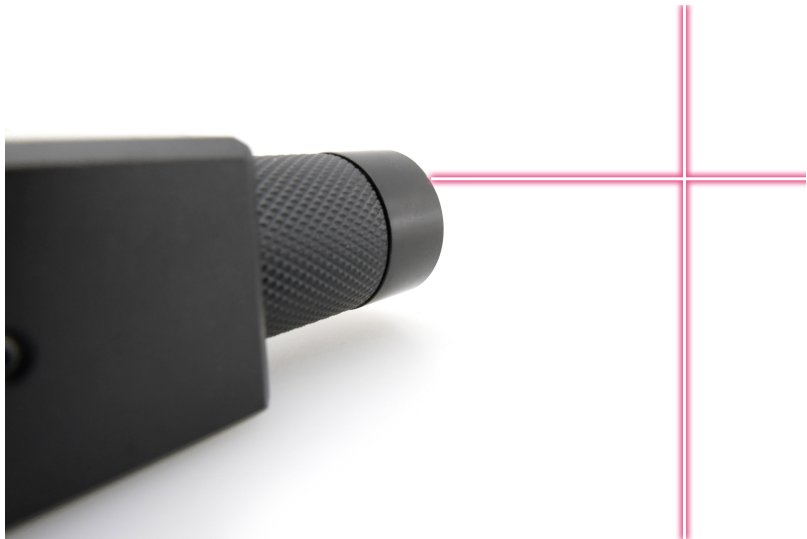

#### Overview:

Laserglow's cross-generating laser modules are ideal for any application where a highly visible cross projected on to a surface is needed. Laser modules are available with fan angles up 90 degrees, which determines the projected length of the two lines at a given distance. The Brightline Pro Red Cross generating laser modules incorporate focus-adjustable optics, greatly increasing the precision for tasks requiring a higher level of accuracy or greater working distance.

#### Key Features:

- **Starting at: \$249**
- **Output Power:** 5 mW to >40 mW
- **Expected Life:** 3000-5000 hours
- **Projection Type (dot/line/cross):** Cross
- **Key Feature:** Projects a focus-adjustable red cross for high precision applications.
- **Minimum achievable line thickness:** 0.5 mm at 30 cm
- **Package Includes:** Alignment laser mounted in block (mounting bracket, attenuator and power supply optional)
- **Casing:** Machined Aluminum
- **Line Straightness:** Better than 0.1% over full length.
- **Perpendicularity of lines:** 90° +/- 0.5°

## Specifications:

This spec sheet has been generated specifically for part number BCP025205, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to BCP025205 have been highlighted below in **red + bold**.

|                                          |                        |
|------------------------------------------|------------------------|
| Output Power (mW)                        | <5, <b>&gt;25</b>      |
| Output Power Stability (%RMS/4h)         | <b>&lt;20</b>          |
| IEC Safety Class                         | 2, <b>3R</b>           |
| Projection Fan Angle (°, full angle)     | <b>7</b> , 90          |
| Divergence (mrad, full angle)            | <b>&lt;0.3</b>         |
| Beam Dimensions (mm, 1/e <sup>2</sup> )  | <b>7</b>               |
| Minimum Achievable Beam Diameter         | <b>0.5 mm at 0.3 m</b> |
| Operating Temperature Range (°C)         | <b>-10 to 40</b>       |
| Max. TTL Modulation Freq. (Hz)           | <b>200</b>             |
| Modulation Input Signal                  | <b>0-5 VDC</b>         |
| Total Power Consumption (W)              | <b>1</b>               |
| Max. Power Input Duty Cycle              | <b>100%</b>            |
| Standard Warranty (months)               | <b>6</b>               |
| MTTF (operational hours)                 | <b>5000</b>            |
| Weight of Product or Laser Head (kg)     | <b>0.1</b>             |
| Dimensions of Product or Laser Head (mm) | <b>73 (l) x 20 (d)</b> |
| Power Supply                             | <b>3.0 VDC input</b>   |

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

### Power Supply Options:

The Brightline Economy and Brightline Pro series of alignment lasers accept direct DC input of 3.0 VDC. The power connector is a 5.5 mm OD, 2.1 mm ID DC Barrel Jack. (center pole positive.) If you do not want to provide DC current directly, we recommend that you use our AC power supply. The model number for the standard North American AC Power Supply is ABP00AFX and you can find complete details here: [www.laserglow.com/ABP](http://www.laserglow.com/ABP). The dimensional drawing for the standard power supply is included on page 5 for your reference.






### Regulatory Classification:

The model you have selected (BCP025205) requires the following safety label(s):



LASERGLOW.COM LIMITED, 873 St. Clair Ave W, Toronto, ON, Canada M6C 1C4

### Dimensional Drawing - Laser Form Factor: B3:

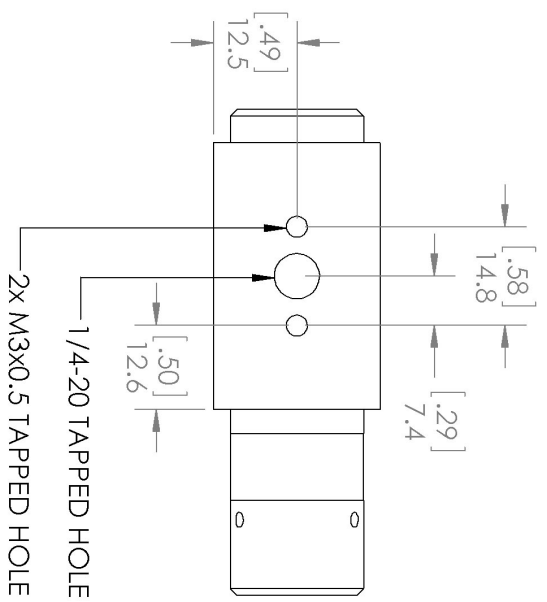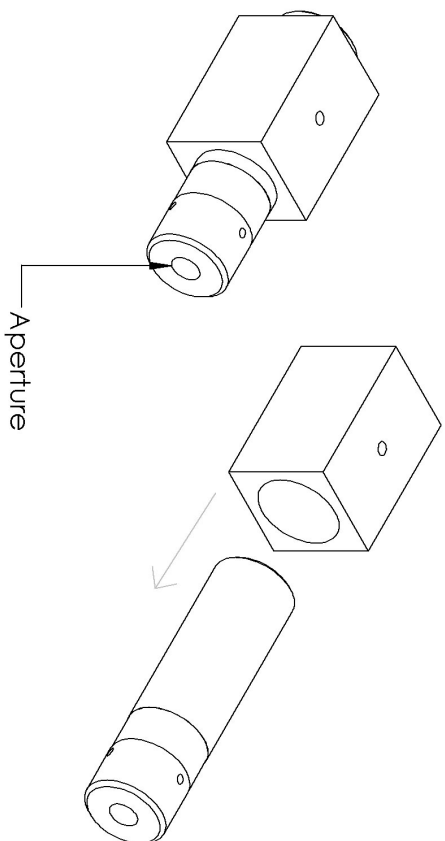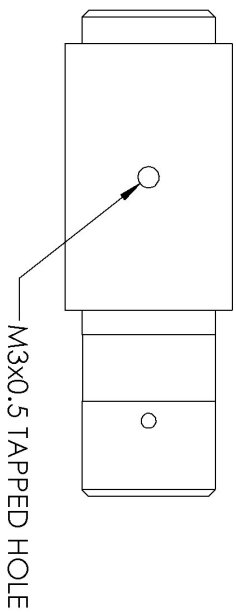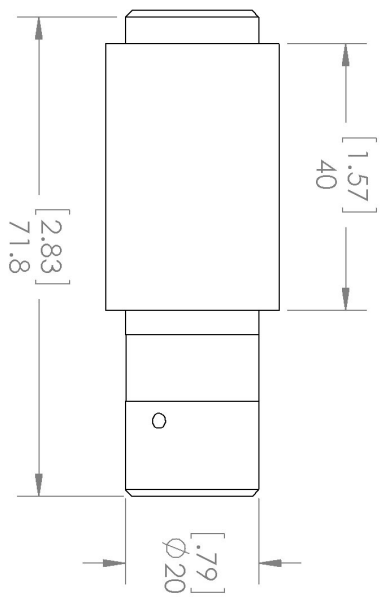

Laserglow Technologies

TITLE:

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MM(INCH)  
TOLERANCES: +/- 0.75 MM

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LASERGLOW TECHNOLOGIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LASERGLOW TECHNOLOGIES IS

LASERGLOW TECHNOLOGIES IS  
PROHIBITED. © 2012 LASERGLOW.COM  
LIMITED. ALL RIGHTS RESERVED

# Brightline Form Factor B3

REV  
1

SCALE: 1:1

SHEET 1 OF 1

## Accessories:

The most popular accessories for model BCP025205 are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

| Part Number                                                                                    | Description                                                                                                                                                            |                     |
|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| <br>ADB002XXX | ADB-deluxe<br>Brightline Deluxe Mounting Bracket<br>V2<br>Full Details: <a href="http://www.laserglow.com/ADB">www.laserglow.com/ADB</a>                               | Included With Laser |
| <br>ABF00AXXX | ABF-N.American<br>Brightline 3V Standard Power Supply (80-260 VAC, N. American plug)<br>Full Details: <a href="http://www.laserglow.com/ABF">www.laserglow.com/ABF</a> | Included With Laser |
| <br>ABC2SPXXX | 2 Lead Brightline Splitter Cable<br>Full Details: <a href="http://www.laserglow.com/ABC">www.laserglow.com/ABC</a>                                                     |                     |

## FOR MORE INFORMATION PLEASE CONTACT:

LASERGLOW TECHNOLOGIES  
99 Ingram Dr. Unit B, North York, ON, Canada M6M2L7  
Tel. (416) 729-7976 Fax (716) 322-3510  
[sales@laserglow.com](mailto:sales@laserglow.com) [www.laserglow.com](http://www.laserglow.com)

E&OE: Data included in this sheet may be subject to change without notice.

Please confirm critical specifications with our staff prior to ordering.