

Laserglow Product Datasheet

LLS-0671 Low-Noise DPSS Laser System

Laserglow Part Number:
L672005FX



Similar Products:

For information about the other lasers in this product family visit:

<http://www.laserglow.com/L67>

Ordering:

Order Online Now or Request Quote:

<http://www.laserglow.com/L672005FX>

Series Specifications:

| | |
|--------------------|--------|
| Nominal Wavelength | 671 nm |
| Output Type | CW |
| Laser Source Type | DPSS |



Overview:

The LLS-0671 Series of Low-Noise Diode-Pumped Solid-State (DPSS) Lasers are ideal for applications requiring less than 1% noise and output power levels from 5 mW to 4 W. These 671 nm lasers maintain a high level of long-term output power stability and long operating lifetime at an aggressively competitive cost.

These lasers are commonly used for various scientific research such as biological experiments, PIV, Raman Spectroscopy, and a broad spectrum of other applications. The driver is available as a complete FDA-compliant system or as an O.E.M. component with significantly reduced dimensions.

Laserglow products are currently being used by some of the World's top universities and other prominent research facilities.

Key Features:

- 1% optical noise (20 Hz-20 MHz)
- Air cooled - no need for water cooling or external chiller
- Lightweight, compact design
- Efficient DPSS technology runs on standard AC power (85 - 264 V, 47 - 63 Hz)
- >10,000 hours continuous maintenance-free operating life
- FDA CDRH Compliant Class IIb / Class IV enclosure
- 48-hour replacement coverage available for an additional fee on specific models

Package Includes:

- Laser Head
- Driver/Power Supply
- Power Cable
- Keys, Safety Interlock

- Hard-shell Carrying Case

Specifications:

This spec sheet has been generated specifically for part number L672005FX, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to L672005FX have been highlighted below in **red + bold**.


| | | | | |
|---|--|---|---------------------------|-----------------------------|
| Output Power (mW) | <5, >10, >30, >50, >100, >200, >300, >500, >800, >1000 | <5, >10, >30, >50, >100, >200 | >2000 | >3000, >4000 |
| Output Power Stability (%RMS/4h) | <1, <2, <3, <5 | <3, <5 | <1, <3, <5 | <1, <3, <5 |
| Central Wavelength (nm) | 670.5 | 670.5 | 670.5 | 670.83 |
| Wavelength Tolerance (+/- nm) | 1 | 1 | 1 | 1 |
| Divergence (mrad, full angle) | <1.5 | <1.5 | <1.5 | <2 |
| Beam Dimensions (mm, 1/e ²) | 2 | 1.2 | 3 | 4 |
| Warm-up Time (minutes) | 10 | 10 | 10 | 10 |
| Optical Noise Amplitude (%RMS @ 20 Hz - 20 MHz) | <1 | <1 | <1 | <1 |
| Spectral Linewidth (nm) | | <0.3 | | <0.3 |
| M ² | <1.2 | <1.2 | <3 | <6 |
| Polarization Ratio | >100 | >100 | >100 | >100 |
| Beam Pointing Stability (mrad) | <0.05 | <0.05 | <0.05 | <0.05 |
| Operating Temperature Range (°C) | 10 to 35 | 10 to 35 | 10 to 35 | 10 to 35 |
| Total Power Consumption (W) | 22, 23 | 22, 23 | | |
| Max. Power Input Duty Cycle | 100% | 100% | 100% | 100% |
| Standard Warranty (months) | 12 | 12 | 12 | 12 |
| MTTF (operational hours) | 10000 | 10000 | 10000 | 10000 |
| Weight of Product or Laser Head (kg) | 2 | 0.6 | 2.6 | 6.1 |
| Beam Height from Base Plate (mm) | 27.4 | 24.8 | 68.2 | 93.5 |
| Dimensions of Product or Laser Head (mm) | 197 (l) x 70 (w) x 50 (h) | 140.8 (l) x 73 (w) x 46.2 (h) | 240 (l) x 99 (w) x 94 (h) | 346 (l) x 140 (w) x 125 (h) |


CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

Power Supply Options:

These lasers are available with several different power supply options. The model that you have selected is highlighted below, and any other options are shown for easy reference.

| | | |
|--|--------------------------|-----------------------------|
| FDA-Compliant LabSpec  | Power Supply Type: | FO |
| | Input Power | 85v to 264v |
| | Power Supply Weight (kg) | 2.6 |
| | Dimensions (mm) | 268 (l) x 145 (w) x 106 (h) |

| | | | | |
|---|--------------------------|-----------------------------------|-----------------------------|-----------------------------|
| FDA-Compliant Standard  | Power Supply Type: | SM | SN | SW |
| | Input Power | 85v to 264v | 85v to 264v | 85v to 264v |
| | Power Supply Weight (kg) | 1.2 | 2.3 | 5.1 |
| | Dimensions (mm) | 133 (l) x 130 (w) x 65 (h) | 238 (l) x 146 (w) x 102 (h) | 307 (l) x 168 (w) x 123 (h) |


*Power supply may not be exactly as shown, see dimensional drawings on next 2 pages.

*Dimensions for fiber-integrated (I_) include laser head packaged inside.




Regulatory Classification:

The model you have selected (L672005FX) requires the following safety label(s):



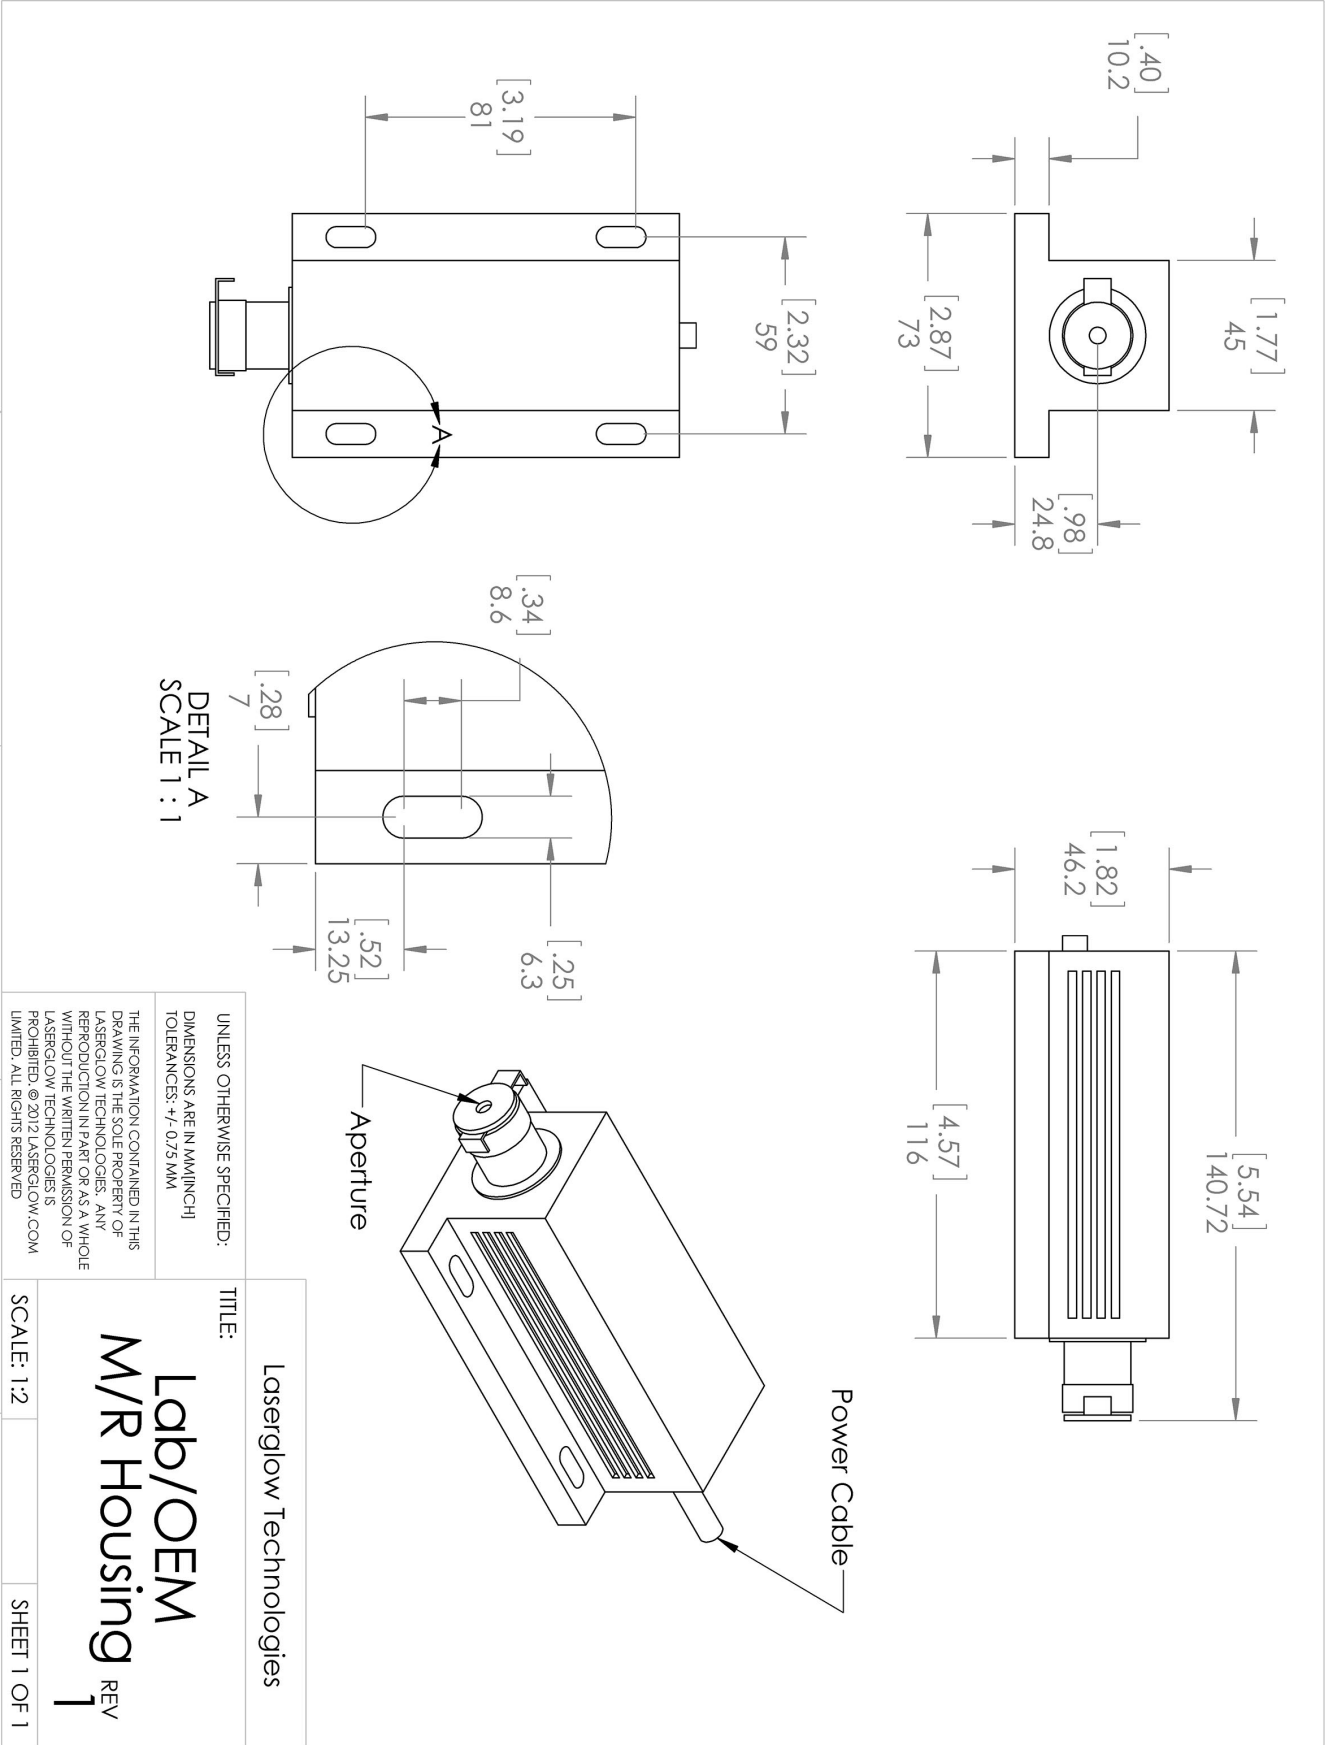

Dimensional Drawing - Power Supply Form Factor: SM:

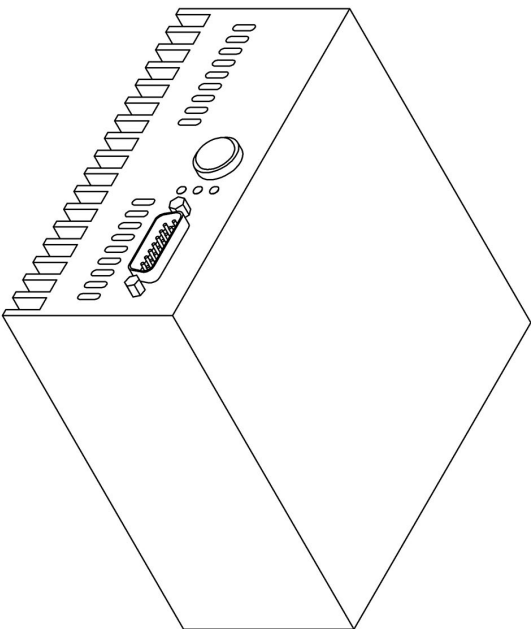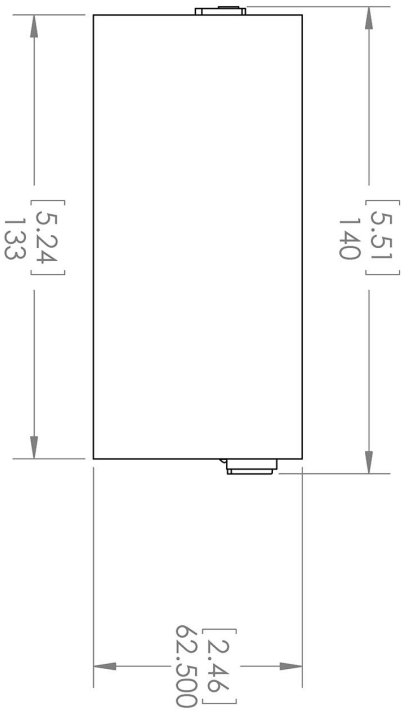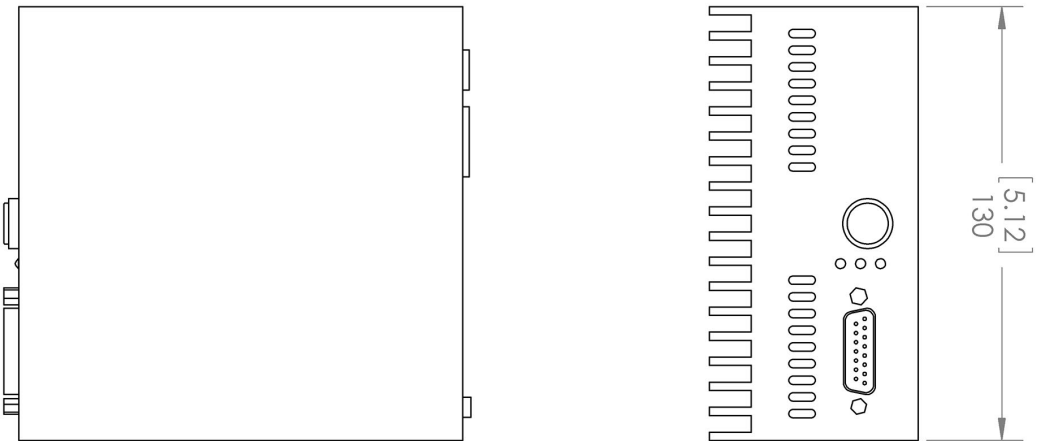

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MM(INCH)
TOLERANCES: +/- 0.75 MM

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LASERGLLOW TECHNOLOGIES. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
LASERGLLOW TECHNOLOGIES IS
PROHIBITED. © 2012 LASERGLLOW.COM
LIMITED. ALL RIGHTS RESERVED

Lasergllow Technologies

TITLE:

Power Supply
SM/SR









REV
1

SCALE: 1:2

SHEET 1 OF 1

Accessories:

The most popular accessories for model L672005FX are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

| Part Number | Description | |
|--|--|---------------------|
|  AFF2002XX | Armored Fiber With FC/PC Connectors 200um Core Multimode 2m length Full Details: www.laserglow.com/AFF | |
|  AFS2002XX | Armored Fiber With SMA 905 Connectors 200um Core Multimode 2 m length Full Details: www.laserglow.com/AFS | |
|  AGF6605XX | LSG-660-NF-5 Fit-Over Safety Goggles 660nm Output: OD 5+ at 600-694 nm CE Certified Full Details: www.laserglow.com/AGF | |
|  ACFVISHXA | FC/PC Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm) (installed and aligned) 11mm diameter input lens Full Details: www.laserglow.com/ACF | |
|  ACSVISHXA | SMA-905 Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm) (installed and aligned) 11mm diameter input lens Full Details: www.laserglow.com/ACS | |
|  ACALBMXXX | Carrying Case-102 Holds Lab/OEM M, R and S size, standard or LabSpec laser Full Details: www.laserglow.com/ACA | Included With Laser |
|  TBK | Complete optics kits with breadboard mounting hardware. External modulators, variable attenuators, free-space fiber launch systems Full Details: www.laserglow.com/TBK | |
|  ACALBMXXX | Carrying Case-102 Holds Lab/OEM M, R and S size, standard or LabSpec laser Full Details: www.laserglow.com/ACA | Included With Laser |

FOR MORE INFORMATION PLEASE CONTACT:

LASERGLOW TECHNOLOGIES
 99 Ingram Dr. Unit B, North York, ON, Canada M6M2L7
 Tel. (416) 729-7976 Fax (716) 322-3510
sales@laserglow.com www.laserglow.com

E&OE: Data included in this sheet may be subject to change without notice.

Please confirm critical specifications with our staff prior to ordering.