

Laserglow Product Datasheet

LPS-0266 AOM Q-Switched DPSS Laser System



Series Specifications:

Nominal Wavelength	266 nm
Output Type	Q-Switched
Laser Source Type	DPSS

Overview:

The LPS-0266 Series of Diode-Pumped Solid-State (DPSS) AOM Q-Switched Lasers are ideal for applications requiring the highest available peak power and/or single pulse energy at 266 nm. The embedded AOM gives the user direct control over the output pulses, enabling a specified frequency or even a single pulse to be emitted.

These lasers are commonly used for materials processing, marking, Raman Spectroscopy, biological experimentation and a broad spectrum of other applications. The driver is available as a complete FDA-compliant system or as an O.E.M. component with significantly reduced dimensions.

Laserglow products are currently being used by some of the World's top universities and other prominent research facilities.

Key Features:

- AOM q-switch allows for active control of pulses
- Air cooled - no need for water cooling or external chiller
- Lightweight, compact design
- Efficient DPSS technology runs on standard AC power (85 - 264 V, 47 - 63 Hz)
- >5,000 hours continuous maintenance-free operating life
- FDA CDRH Compliant Class IV enclosure
- 48-hour replacement coverage available for an additional fee on specific models

Package Includes:

- Laser Head
- Driver/Power Supply
- Power Cable
- Keys, Safety Interlock
- Hard-shell Carrying Case

Specifications:

This spec sheet has been generated specifically for part number P26-Q, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to P26-Q have been highlighted below in **red + bold**.


Output Power (mW)	>10, >30, >50, >100, >200	>10
Single Pulse Energy (μJ)	3, 5, 10, 20	1
Optimal Pulse Frequency (Hz)	10000	10000
Output Power Stability (%RMS/4h)	<3, <5, <10	<10
Central Wavelength (nm)	266.95	
Wavelength Tolerance (+/- nm)	1	
Divergence (mrad, full angle)	<2, <3.5, <15	<3.5
Beam Dimensions (mm, 1/e ²)	0.5x2, 4	4
Warm-up Time (minutes)	10	
Avg. Pulse Duration (ns)	10	
Approx. Timing Jitter (+/- ns)	10	
Approx. Trigger-Pulse Latency (μs)	200	
Spectral Linewidth (nm)	<0.1	
M ²	<2	
Operating Temperature Range (°C)	15 to 35	
Max. TTL Modulation Freq. (Hz)	50000	50000
Modulation Input Signal	0-5 VDC	0-5 VDC
Max. Power Input Duty Cycle	100%	100%
Standard Warranty (months)	12	12
MTTF (operational hours)	5000	5000
Weight of Product or Laser Head (kg)	6.1	4.7
Beam Height from Base Plate (mm)	93.5	56
Dimensions of Product or Laser Head (mm)	346 (l) x 140 (w) x 125 (h)	264 (l) x 224 (w) x 101 (h)

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

Power Supply Options:

These lasers are available with several different power supply options. The model that you have selected is highlighted below, and any other options are shown for easy reference.


	Power Supply Type:	AW
	Input Power	85v to 264v
	Power Supply Weight (kg)	6.88
	Dimensions (mm)	334 (l) x 300 (w) x 123 (h)

*Power supply may not be exactly as shown, see dimensional drawings on next 2 pages.


*Dimensions for fiber-integrated (I_) include laser head packaged inside.

Regulatory Classification:


The model you have selected (P26-Q) requires the following safety label(s):

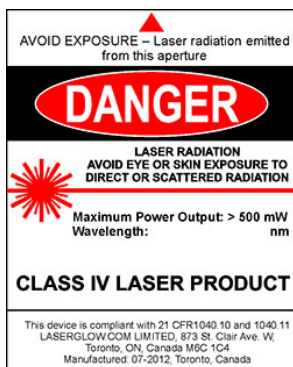

Dimensional Drawing - Laser Form Factor: Q:

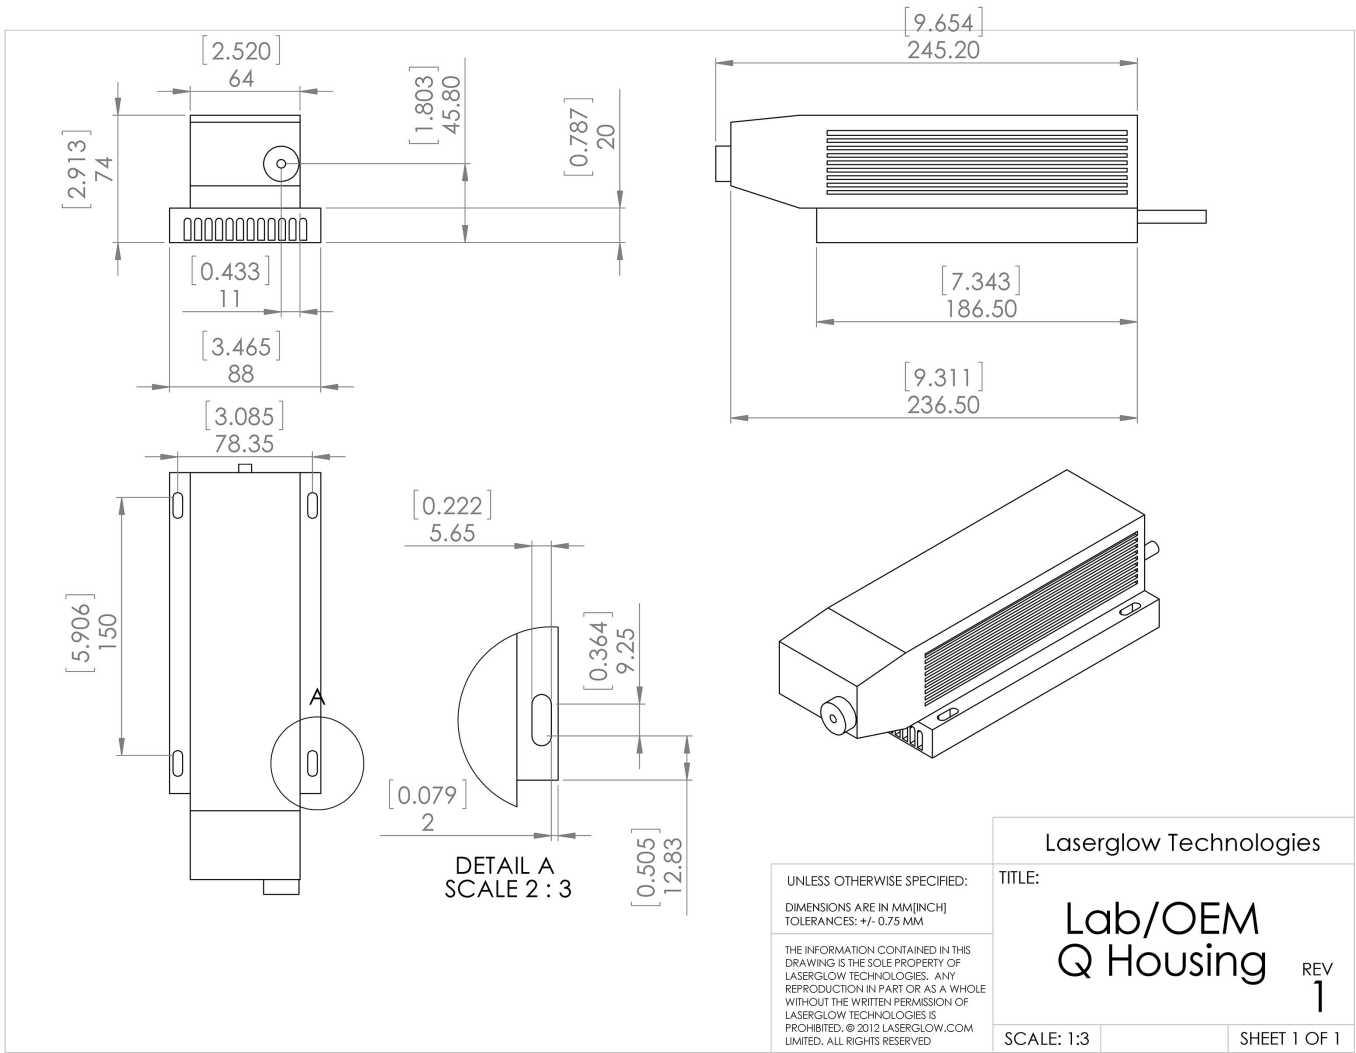



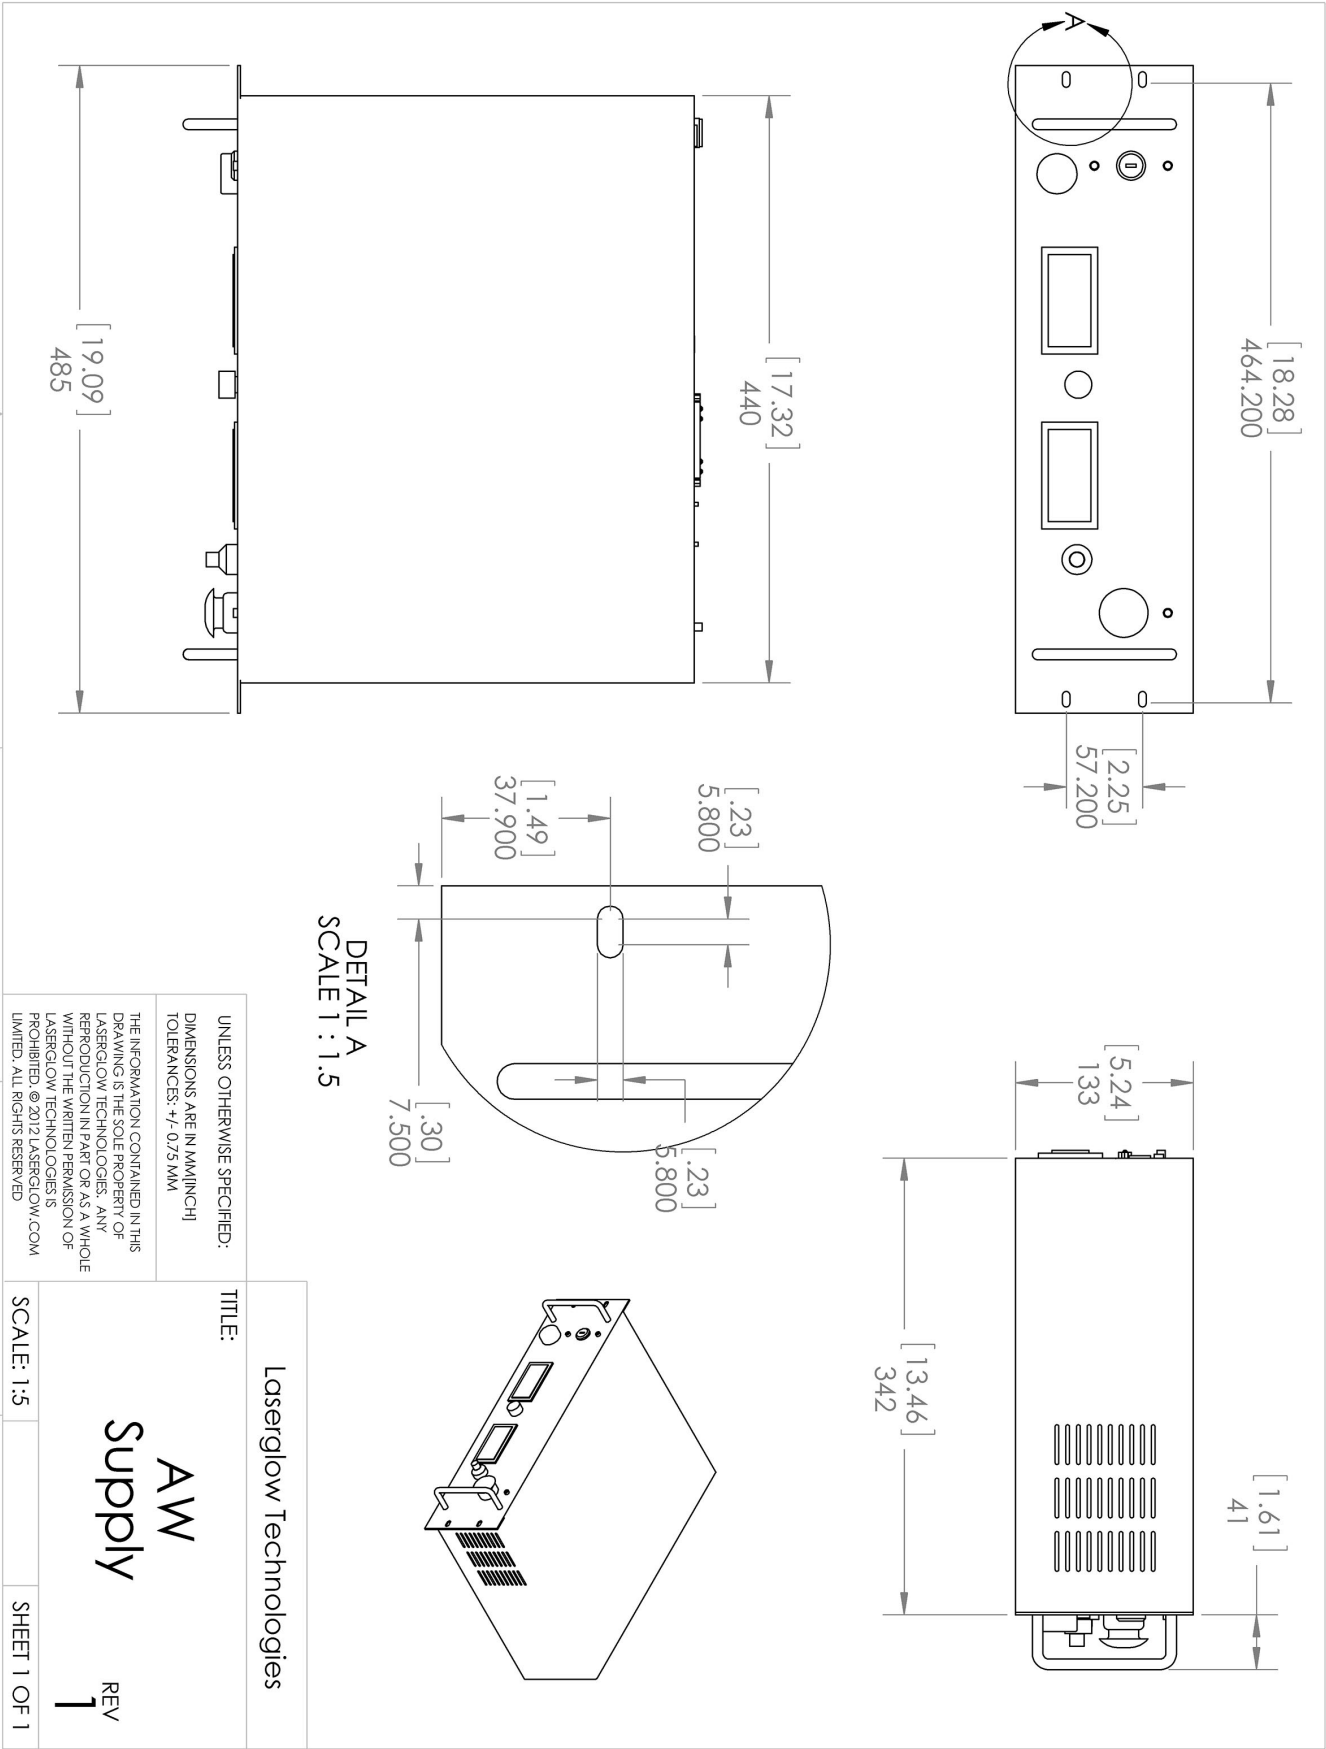



Dimensional Drawing - Power Supply Form Factor: AW:



Accessories:

The most popular accessories for model P26-Q are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

Part Number	Description	
 AGF5327XX	LSG-532-NF-7 Fit-Over Safety Goggles 532nm Output: OD 7+ at 190-532 nm CE Certified Full Details: www.laserglow.com/AGF	
 ACALBNWXX	Carrying Case-104 Holds Lab/OEM N or W size Standard/Labspec laser Full Details: www.laserglow.com/ACA	Included With Laser
 ACFUV1HXX	FC/PC Fiber Coupler/Collimator for ultraviolet wavelengths (266 to 399 nm) 11mm diameter input lens Full Details: www.laserglow.com/ACF	
 ACSUV1HXX	SMA Fiber Coupler/Collimator for ultraviolet wavelengths (266 to 399 nm) 11mm diameter input lens Full Details: www.laserglow.com/ACS	
 AFF2002XX	Armored Fiber With FC/PC Connectors 200um Core Multimode 2m length Full Details: www.laserglow.com/AFF	
 AFS2002XX	Armored Fiber With SMA 905 Connectors 200um Core Multimode 2 m length Full Details: www.laserglow.com/AFS	

FOR MORE INFORMATION PLEASE CONTACT:

LASERGLOW TECHNOLOGIES
99 Ingram Dr. Unit B, North York, ON, Canada M6M2L7
Tel. (416) 729-7976 Fax (716) 322-3510
sales@laserglow.com www.laserglow.com

E&OE: Data included in this sheet may be subject to change without notice.

Please confirm critical specifications with our staff prior to ordering.