

Laserglow Product Datasheet

Fiber-Integrated Laser System (Raman Spectroscopy)

Image Coming Soon!

Series Specifications:

| Nominal Wavelength | 633 nm |
|--------------------|--------|
| Output Type | CW |
| Laser Source Type | Diode |

Overview:

Specifications:

This spec sheet has been generated specifically for part number V62-I, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to V62-I have been highlighted below in red + bold.

| Output Power (mW) | >50, >100, >200 |
|--|-----------------------------|
| Output Power Stability (%RMS/4h) | <1, <3 |
| Central Wavelength (nm) | 633 |
| Wavelength Tolerance (+/- nm) | 0.5 |
| Spectral Linewidth (nm) | <0.1 |
| Max. Analog Modulation Freq. (Hz) | 30000 |
| Max. TTL Modulation Freq. (Hz) | 30000 |
| Modulation Input Signal | 0-5 VDC |
| Max. Power Input Duty Cycle | 100% |
| Standard Warranty (months) | 12 |
| MTTF (operational hours) | 10000 |
| Weight of Product or Laser Head (kg) | 5.4 |
| Dimensions of Product or Laser Head (mm) | 314 (l) x 290 (w) x 134 (h) |

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

Power Supply Options:

These lasers are available with several different power supply options. The model that you have selected is highlighted below, and any other options are shown for easy reference.

| | Power Supply Type: | II |
|-----------------------------|-----------------------------|-----------------------|
| Fiber-Integrated LabSpec | Input Power | 85v to 264v |
| Labopeo | Power Supply Weight (kg) | 0 |
| | Dimensions (mm) | 0 (l) x 0 (w) x 0 (h) |

^{*}Power supply may not be exactly as shown, see dimensional drawings on next 2 pages.


Regulatory Classification:

The model you have selected (V62-I) requires the following safety label(s):



^{*}Dimensions for fiber-integrated (I_) include laser head packaged inside.

Dimensional Drawing - Laser Form Factor: I:

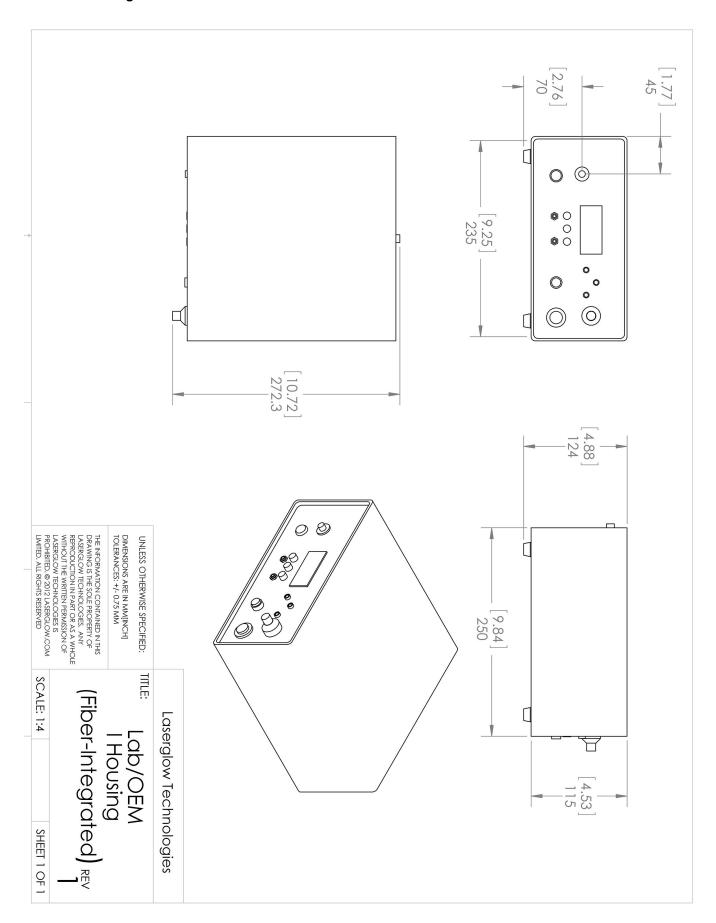

Accessories:

The most popular accessories for model V62-I are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

| Part Number | D | | |
|-------------|-------------|--|--|
| Part Number | Description | | |
| | | | |

FOR MORE INFORMATION PLEASE CONTACT:

LASERGLOW TECHNOLOGIES
99 Ingram Dr. Unit B, North York, ON, Canada M6M2L7
Tel. (416) 729-7976 Fax (716) 322-3510
sales@laserglow.com www.laserglow.com

E&OE: Data included in this sheet may be subject to change without notice.

Please confirm critical specifications with our staff prior to ordering.