

Laserglow Product Datasheet

Electra Portable Violet Laser Module

Laserglow Part Number: GEP005XXX

This model is listed as **inactive** in our product database. Stock may be limited, and availability is subject to change without notice.

Similar Products:

For information about the other lasers in this product family visit:

http://www.laserglow.com/GEP

Ordering:

Order Online Now or Request Quote:

http://www.laserglow.com/GEP005XXX

Series Specifications:

Nominal Wavelength	405 nm
Output Type	CW
Laser Source Type	Diode



Overview:

The shortest wavelength available in a laser pointer, the Electra produces laser light very close to the ultraviolet part of the visible spectrum at 405 nm. The unique properties of this laser include the ability to excite fluorescent and phosphorescent materials. The Electra can be a useful educational tool in the classroom as well as a reliable near-UV portable light source for field work.

Key Features:

- Starting at:\$199
- Output Power: 5 mW
 Typested Life: 5000 hours
- Expected Life: 5000 hoursWavelength: 405 nm (violet)
- Key Feature: Violet beam causes fluorescence effect in various materials
- Package Includes: Portable laser, aluminum carrying case, instructions/warranty.
- · Casing: High-gloss black painted brass housing
- Safety Info: Under 5 mW complies with Class IIIa regulations
- Duty Cycle: 100%

Specifications:

This spec sheet has been generated specifically for part number GEP005XXX, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to GEP005XXX have been highlighted below in **red + bold**.

Output Power (mW)	<5
Central Wavelength (nm)	405
Divergence (mrad, full angle)	<0.5
Beam Dimensions (mm, 1/e²)	3.5
Approximate Peak Power (W)	5
Operating Temperature Range (°C)	20 to 35
Total Power Consumption (W)	3
Max. Power Input Duty Cycle	100%
Standard Warranty (months)	6
MTTF (operational hours)	5000
Weight of Product or Laser Head (kg)	0.1
Dimensions of Product or Laser Head (mm)	150 (l) x 16.5 (d)
Power Supply	2 x CR2 Batteries

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.


Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

Regulatory Classification:

The model you have selected (GEP005XXX) requires the following safety label(s):



Dimensional Drawing - Laser Form Factor: GAP:

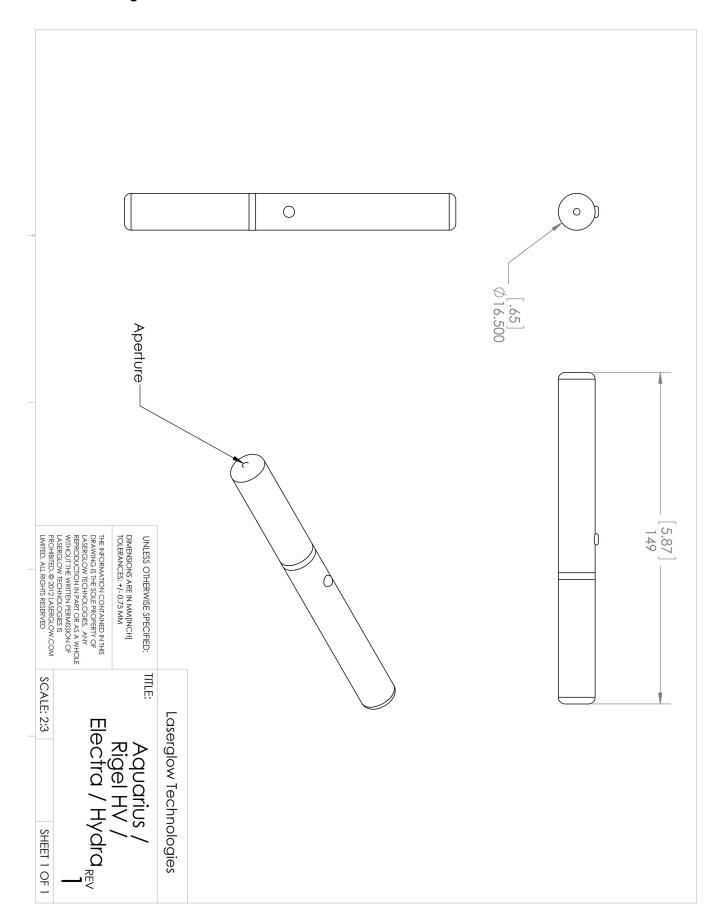

Accessories:

The most popular accessories for model GEP005XXX are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

Part Number	Description	
AGF5322XX	LSG-532-NF-2 Fit-Over Safety Goggles 532nm Output: OD 2+ at 400-532 nm CE Certified Full Details: www.laserglow.com/AGF	
AGS5322XX	LSG-532-NS-2 Sport Laser Safety Goggles 532nm Output: OD 2+ at 400-532 nm CE Certified Full Details: www.laserglow.com/AGS	
AGF5327XX	LSG-532-NF-7 Fit-Over Safety Goggles 532nm Output: OD 7+ at 190-532 nm CE Certified Full Details: www.laserglow.com/AGF	
ACAGAQ1XX	Carrying Case-7 Aquarius/Electra/Rigel HV/Hydra Full Details: www.laserglow.com/ACA	Included With Laser

FOR MORE INFORMATION PLEASE CONTACT:

LASERGLOW TECHNOLOGIES
99 Ingram Dr. Unit B, North York, ON, Canada M6M2L7
Tel. (416) 729-7976 Fax (716) 322-3510
sales@laserglow.com www.laserglow.com

E&OE: Data included in this sheet may be subject to change without notice.

Please confirm critical specifications with our staff prior to ordering.