

Laserglow Product Datasheet

Brightline Premium Complex Pattern Projecting Laser

Laserglow Part Number: BOQ020254

Similar Products: For information about the other lasers in this product family visit: http://www.laserglow.com/BOQ

Order Online Now or Request Quote: http://www.laserglow.com/BOQ020254

Series Specifications:

Nominal Wavelength635 nmOutput TypeCWLaser Source TypeDiode

Overview:

Image Coming Soon!

Specifications:

This spec sheet has been generated specifically for part number BOQ020254, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to BOQ020254 have been highlighted below in red + bold.

Output Power (mW)	5, 20 , 40	
IEC Safety Class	2 , 3R	
Projection Type (See below for detail)	25 Parallel Lines (DOE #254) 5 Concentric Circles (DOE #259) 5 Parallel Lines (DOE #252)	
Projection Fan Angle (°, full angle)	5, 7, 18, 21, 22, 26 , 29, 34, 44	
Divergence (mrad, full angle)	<0.3	
Beam Dimensions (mm, 1/e ²)	7	
Minimum Achievable Beam Diameter	0.25 mm at 0.3 m	
IP rating	67	
Max. TTL Modulation Freq. (Hz)	500	
Modulation Input Signal	0-5 VDC	
Total Power Consumption (W)	1	
Max. Power Input Duty Cycle	100	
Standard Warranty (months)	6	
MTTF (operational hours)	6000	
Weight of Product or Laser Head (kg)	0.26	
Dimensions of Product or Laser Head (mm)	68 (I) x 20 (d)	
Power Supply	3-6 VDC input	

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a


different frequency.

Power Supply Options:

The Brightline Premium series of alignment lasers accept direct DC input of 3 to 6 VDC. The power connector is a 5.5 mm OD, 2.1 mm ID DC Barrel Jack (center pole positive), but non-waterproof connectors are compatible. If you do not want to provide DC current directly, we recommend that you use our AC power supply. The model number for the standard North American AC Power Supply is ABF05AWXX and you can find complete details here: www.laserglow.com/ABF.

Projection Types:


The folowing projection types are available for this laser series.

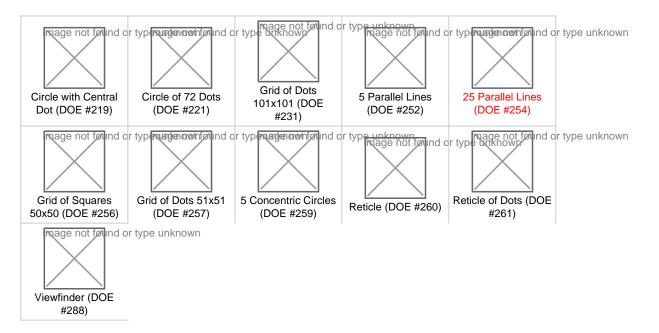

Regulatory Classification:

The model you have selected (BOQ020254) requires the following safety label(s):



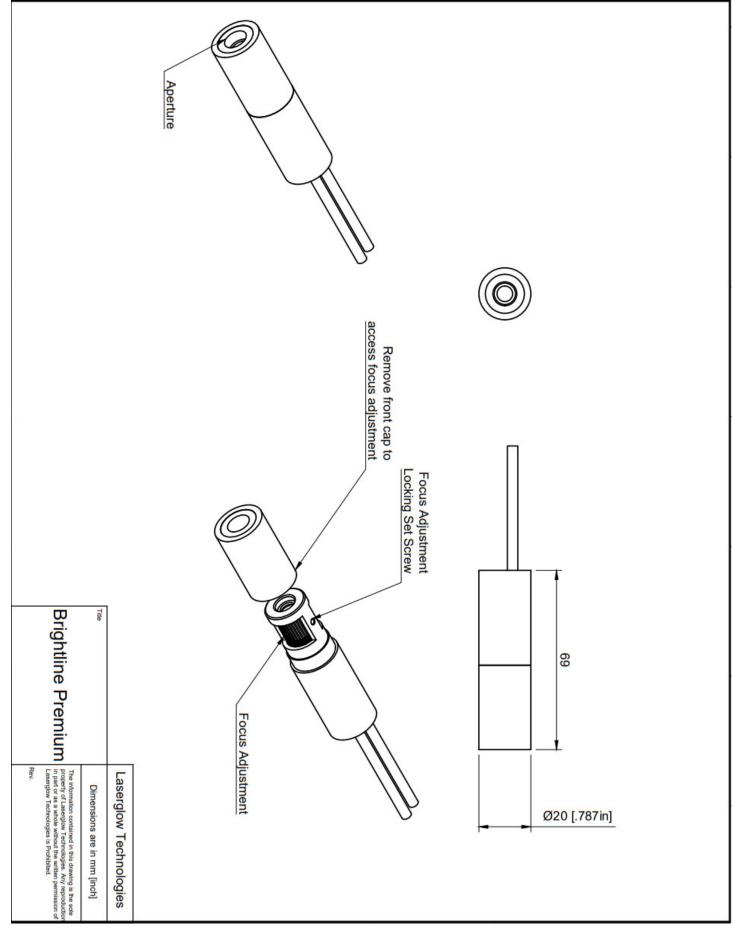

Accessories:

The most popular accessories for model BOQ020254 are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

Part Number	Description	
ADB002XXX	ADB-deluxe Brightline Deluxe Mounting Bracket V2 Full Details: <u>www.laserglow.com/ADB</u>	Included With Laser
ABC2SPXXX	2 Lead Brightline Splitter Cable Full Details: <u>www.laserglow.com/ABC</u>	
ABC4SPXXX	4 Lead Brightline Splitter Cable Full Details: <u>www.laserglow.com/ABC</u>	
ABC72EXXX	2 m (6 ft) Brightline Power Extension Cable Full Details: <u>www.laserglow.com/ABC</u>	
ABF05A3WX	ABF-N.American Brightline Premium 5V Power Supply (80-260 VAC, N. American plug) 3A w/WP connector For Brightline Premium Only Full Details: www.laserglow.com/ABF	Included With Laser

FOR MORE INFORMATION PLEASE CONTACT:

LASERGLOW TECHNOLOGIES 99 Ingram Dr. Unit B, North York, ON, Canada M6M2L7 Tel. (416) 729-7976 Fax (716) 322-3510 sales@laserglow.com www.laserglow.com

E&OE: Data included in this sheet may be subject to change without notice. Please confirm critical specifications with our staff prior to ordering.