

## Laserglow Product Datasheet

---

### Brightline Premium Complex Pattern Projecting Laser

**Laserglow Part Number:**  
**BOQ020257**

**Similar Products:**

For information about the other lasers in this product family visit:

<http://www.laserglow.com/BOQ>

**Ordering:**

Order Online Now or Request Quote:

<http://www.laserglow.com/BOQ020257>

**Series Specifications:**

|                    |        |
|--------------------|--------|
| Nominal Wavelength | 635 nm |
| Output Type        | CW     |
| Laser Source Type  | Diode  |

**Overview:**

Image  
Coming  
Soon!

## Specifications:

This spec sheet has been generated specifically for part number BOQ020257, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to BOQ020257 have been highlighted below in **red + bold**.

|  |  |
|--|--|
| Output Power (mW)                        | 5, <b>20</b> , 40  |
| IEC Safety Class                         | <b>2</b> , 3R  |
| Projection Type (See below for detail)   | 25 Parallel Lines (DOE #254)<br>5 Concentric Circles (DOE #259)<br>5 Parallel Lines (DOE #252) |
| Projection Fan Angle (°, full angle)     | 5, 7, 18, 21, <b>22</b> , 26, 29, 34, 44   |
| Divergence (mrad, full angle)            | <b>&lt;0.3</b>   |
| Beam Dimensions (mm, 1/e <sup>2</sup> )  | <b>7</b>   |
| Minimum Achievable Beam Diameter         | <b>0.25 mm at 0.3 m</b>  |
| IP rating                                | <b>67</b>  |
| Max. TTL Modulation Freq. (Hz)           | <b>500</b>   |
| Modulation Input Signal                  | <b>0-5 VDC</b>   |
| Total Power Consumption (W)              | <b>1</b>   |
| Max. Power Input Duty Cycle              | <b>100</b>   |
| Standard Warranty (months)               | <b>6</b>   |
| MTTF (operational hours)                 | <b>6000</b>  |
| Weight of Product or Laser Head (kg)     | <b>0.26</b>  |
| Dimensions of Product or Laser Head (mm) | <b>68 (l) x 20 (d)</b>   |
| Power Supply                             | <b>3-6 VDC input</b>   |

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.












Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

Power Supply Options:

The Brightline Premium series of alignment lasers accept direct DC input of 3 to 6 VDC. The power connector is a 5.5 mm OD, 2.1 mm ID DC Barrel Jack (center pole positive), but non-waterproof connectors are compatible. If you do not want to provide DC current directly, we recommend that you use our AC power supply. The model number for the standard North American AC Power Supply is ABF05AWXX and you can find complete details here: [www.laserglow.com/ABF](http://www.laserglow.com/ABF).

Projection Types:

The folowing projection types are available for this laser series.




|   |  |  |  |  |
|---|--|--|--|--|
| <br>Circle with Central Dot (DOE #219) | <br>Circle of 72 Dots (DOE #221)  | <br>Grid of Dots 101x101 (DOE #231) | <br>5 Parallel Lines (DOE #252) | <br>25 Parallel Lines (DOE #254) |
| <br>Grid of Squares 50x50 (DOE #256)   | <br>Grid of Dots 51x51 (DOE #257) | <br>5 Concentric Circles (DOE #259) | <br>Reticle (DOE #260)          | <br>Reticle of Dots (DOE #261)   |
| <br>Viewfinder (DOE #288)              |  |  |  |  |

Regulatory Classification:

The model you have selected (BOQ020257) requires the following safety label(s):



Dimensional Drawing - Laser Form Factor: B9:

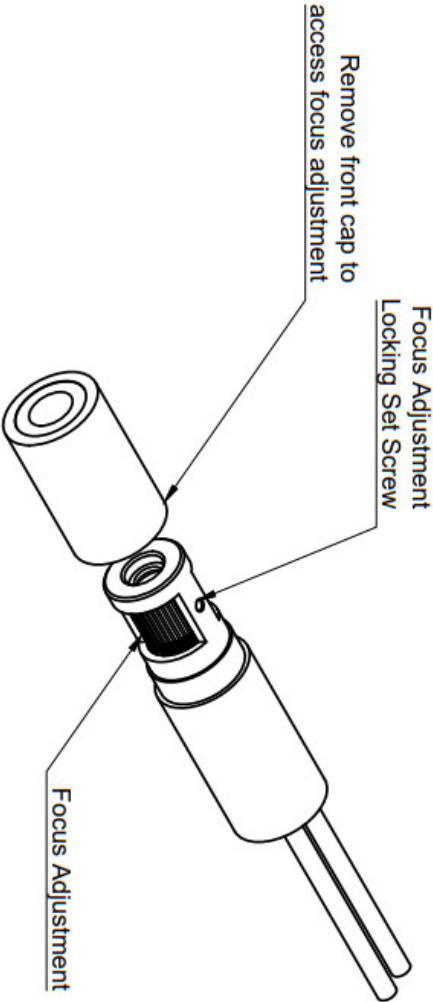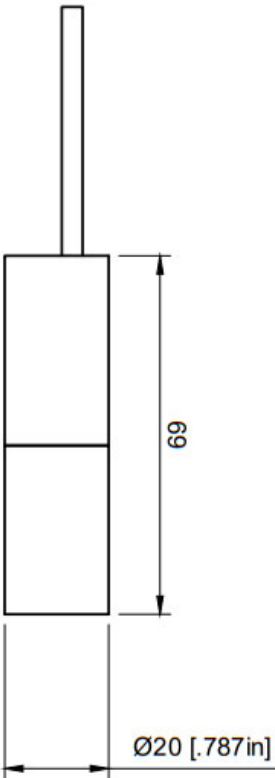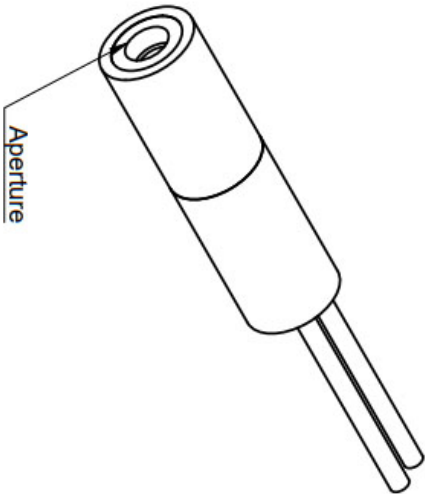

|                    |  |  |  |
|--------------------|--|--|--|
| Title              |  | Laserglow Technologies   |  |
| Brightline Premium |  | Dimensions are in mm [inch]  |  |
| Rev.               |  | The information contained in this drawing is the sole property of Laserglow Technologies. Any reproduction in part or as a whole without the written permission of Laserglow Technologies is Prohibited. |  |

## Accessories:

The most popular accessories for model BOQ020257 are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

| Part Number   | Description   |                     |
|---|---|---------------------|
| <br>ADB002XXX  | ADB-deluxe<br>Brightline Deluxe Mounting Bracket<br>V2<br>Full Details: <a href="http://www.laserglow.com/ADB">www.laserglow.com/ADB</a>  | Included With Laser |
| <br>ABC2SPXXX  | 2 Lead Brightline Splitter Cable<br>Full Details: <a href="http://www.laserglow.com/ABC">www.laserglow.com/ABC</a>  |                     |
| <br>ABC4SPXXX  | 4 Lead Brightline Splitter Cable<br>Full Details: <a href="http://www.laserglow.com/ABC">www.laserglow.com/ABC</a>  |                     |
| <br>ABC72EXXX  | 2 m (6 ft) Brightline Power Extension Cable<br>Full Details: <a href="http://www.laserglow.com/ABC">www.laserglow.com/ABC</a>   |                     |
| <br>ABF05A3WX | ABF-N.American Brightline Premium 5V<br>Power Supply (80-260 VAC, N. American plug)<br>3A w/WP connector<br>For Brightline Premium Only<br>Full Details: <a href="http://www.laserglow.com/ABF">www.laserglow.com/ABF</a> | Included With Laser |

## FOR MORE INFORMATION PLEASE CONTACT:

LASERGLOW TECHNOLOGIES  
99 Ingram Dr. Unit B, North York, ON, Canada M6M2L7  
Tel. (416) 729-7976 Fax (716) 322-3510  
[sales@laserglow.com](mailto:sales@laserglow.com) [www.laserglow.com](http://www.laserglow.com)

E&OE: Data included in this sheet may be subject to change without notice.

Please confirm critical specifications with our staff prior to ordering.