

LRD-0980 Collimated Diode Laser System



Series Specifications:

| | |
|--------------------|--------|
| Nominal Wavelength | 980 nm |
| Output Type | CW |
| Laser Source Type | Diode |

Overview:

The LRD-0980 Series of Collimated Diode (Semiconductor) Lasers are ideal for applications requiring a wavelength of around 980 nm and a wide range of output power levels from 10 mW to 50 W with a high level of long-term output power stability and long operating lifetime at an aggressively competitive cost.

These lasers are commonly used for communications research, machine vision, scientific applications involving spectral analysis, biology research, and a broad spectrum of other applications. The driver is available as a complete FDA-compliant system or as an O.E.M. component with significantly reduced dimensions.

Available with onboard and remote on/off control as well as a wide array of output power and stability levels, Laserglow products are currently being used by some of the World's top universities and other prominent research facilities.

Key Features:

- TEC cooled - no need for water cooling or external chiller
- Lightweight, compact design
- Efficient Diode Laser technology runs on standard AC power (85 - 264 V, 47 - 63 Hz)
- >10,000 hours continuous maintenance-free operating life
- FDA CDRH Compliant Class IIIb / Class IV enclosure
- 48-hour replacement coverage available for an additional fee on specific models

Package Includes:

- Laser Head
- Driver/Power Supply
- Power Cable
- BNC Connector (LabSpec models only)
- Keys, Safety Interlock
- Hard-shell Carrying Case

Specifications:

This spec sheet has been generated specifically for part number D98-V, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to D98-V have been highlighted below in **red + bold**.

| Laser Form Factor | RL | R | T | V |
|---|-----------------|--------------------------|-----------------|------------------------------------|
| Output Power (mW) | >10, >50, >100 | >100, >500, >1000, >2000 | >3000, >5000 | >8000, >10000 |
| Output Power Stability (%RMS/4h) | <1, <3, <5, <10 | <1, <3, <5, <10 | <1, <3, <5, <10 | <1, <3, <5, <10 |
| FDA Safety Class | IIIb | IIIb, IV | IV | IV |
| Central Wavelength (nm) | 980 | 978 | 978 | 978 |
| Wavelength Tolerance (+/- nm) | 10 | 5 | 3 | 3 |
| Divergence (mrad, full angle) | <1 | <3 | <3 | <3 |
| Beam Dimensions (mm, 1/e ²) | 3.5 | 5x8 | 5x8 | 5x8 |
| Transverse Mode | Near TEM00 | Multimode | Multimode | Multimode |
| Longitudinal Modes | Multiple | Multiple | Multiple | Multiple |
| Warm-up Time (minutes) | 5 | 5 | 5 | 5 |
| M ² | | <20 | <20 | <20 |
| Polarization Ratio | >50 | >50 | | |
| Beam Pointing Stability (mrad) | <0.05 | <0.05 | <0.05 | <0.05 |
| Operating Temperature Range (°C) | 10 to 35 | 10 to 35 | 10 to 35 | 10 to 35 |
| Storage Temperature Range (°C) | -10 to | -10 to | -10 to | -10 to 50 |
| Max. Analog Modulation Freq. (Hz) | 30000 | 30000 | 30000 | 30000 |
| Max. TTL Modulation Freq. (Hz) | 10000, 30000 | 10000, 30000 | 10000, 30000 | 10000, 30000 |
| Modulation Input Signal | 0-5 VDC | 0-5 VDC | 0-5 VDC | 0-5 VDC |
| Total Power Consumption (W) | | 16, 22 | | |
| Max. Power Input Duty Cycle | 100% | 100% | 100% | 100% |
| Cooling Method | TEC | TEC | TEC/Forced Air | TEC/Forced Air |
| Standard Warranty (months) | 12 | 12 | 12 | 12 |
| MTTF (operational hours) | 10000 | 10000 | 10000 | 10000 |
| Weight of Product or Laser Head (kg) | 0.6 | 0.6 | 0.9 | 2.6 |

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

Specifications Page 2:


| Laser Form Factor | RL | R | T | V |
|--|-------------------------------|-------------------------------|---------------------------|----------------------------------|
| Beam Height from Base Plate (mm) | 24.8 | 24.8 | 29 | 68.2 |
| Dimensions of Product or Laser Head (mm) | 140.7 (l) x 73 (w) x 46.2 (h) | 140.7 (l) x 73 (w) x 46.2 (h) | 155 (l) x 77 (w) x 60 (h) | 235 (l) x 99 (w) x 94 (h) |


CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

Power Supply Options:

These lasers are available with several different power supply options. The model that you have selected is highlighted below, and any other options are shown for easy reference.

| | Power Supply Type: | SR | ST | SV |
|---|--------------------------|----------------------------|-----------------------------|-----------------------------|
|  FDA-Compliant Standard | Input Power | 85v to 264v | 85v to 264v | 85v to 264v |
| | Power Supply Weight (kg) | 1.2 | 2.3 | 2.3 |
| | Dimensions (mm) | 133 (l) x 130 (w) x 65 (h) | 238 (l) x 146 (w) x 102 (h) | 238 (l) x 146 (w) x 102 (h) |


| | Power Supply Type: | FR | FT | FV |
|--|--------------------------|----------------------------|-----------------------------|------------------------------------|
|  FDA-Compliant LabSpec | Input Power | 85v to 264v | 85v to 264v | 85v to 264v |
| | Power Supply Weight (kg) | 1.5 | 2.6 | 2.6 |
| | Dimensions (mm) | 154 (l) x 155 (w) x 95 (h) | 268 (l) x 145 (w) x 106 (h) | 268 (l) x 145 (w) x 106 (h) |

*Power supply may not be exactly as shown, see dimensional drawings on next 2 pages.




*Dimensions for fiber-integrated (I_) include laser head packaged inside.

Regulatory Classification:

The model you have selected (D98-V) requires the following safety label(s):

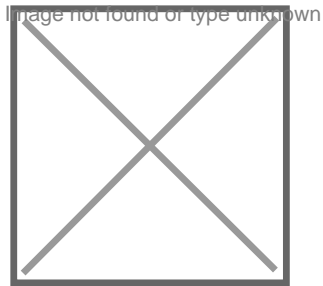

Dimensional Drawing - Power Supply Form Factor: FV:

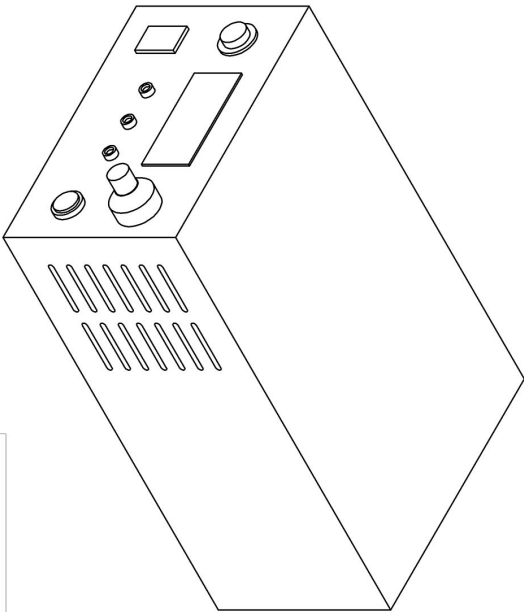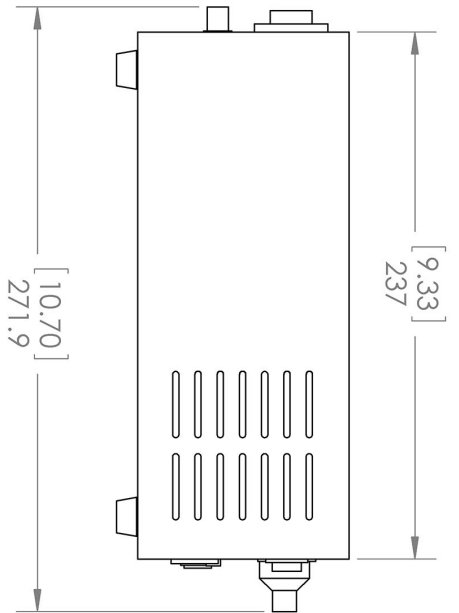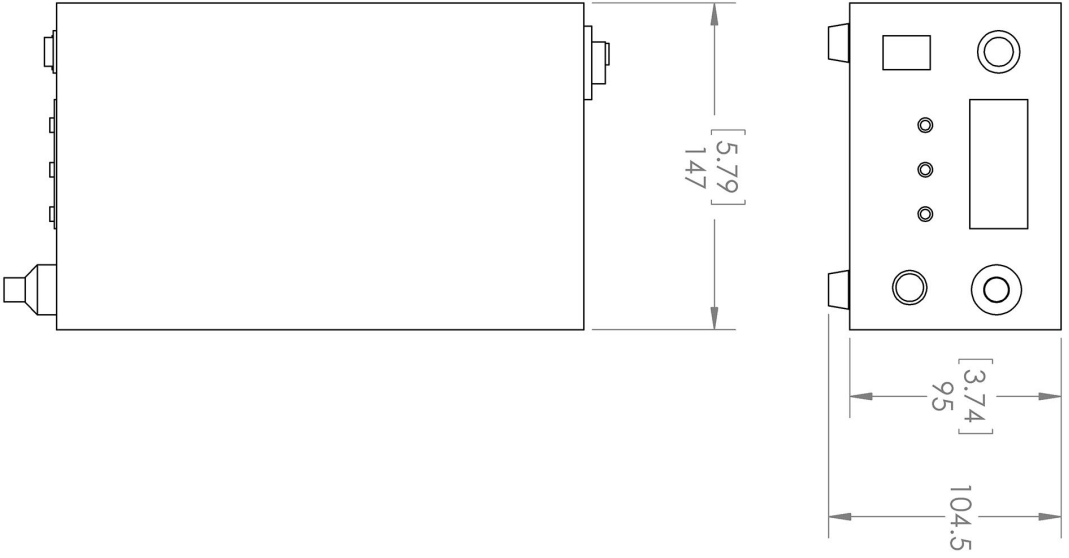

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MM(INCH)
 TOLERANCES: +/- 0.75 MM







THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LASERGLOW TECHNOLOGIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LASERGLOW TECHNOLOGIES IS PROHIBITED. © 2012 LASERGLOW.COM LIMITED. ALL RIGHTS RESERVED

| | |
|--|--------------|
| TITLE: Power Supply FA/FO/FT/FV REV 1 | |
| SCALE: 1:3 | SHEET 1 OF 1 |

Laserglow Technologies

Accessories:

The most popular accessories for model D98-V are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

| Part Number | Description | |
|--|---|---------------------|
|  AGFA647XX | LSG-1064-NF-7 Fit-Over Safety Goggles 1064nm Output: OD 7+ at 950-1070 nm CE Certified Full Details: www.laserglow.com/AGF | |
|  ACFNIRHXA | FC/PC Fiber Coupler/Collimator for IR wavelengths (700 to 1000 nm) (installed and aligned) 11mm diameter input lens Full Details: www.laserglow.com/ACF | |
|  ACSNIRHXA | SMA-905 Fiber Coupler/Collimator for IR wavelengths (700 to 1000nm) (installed and aligned) 11mm diameter input lens Full Details: www.laserglow.com/ACS | |
|  AFS2002XX | Armored Fiber With SMA 905 Connectors 200um Core Multimode 2 m length Full Details: www.laserglow.com/AFS | |
|  AFF2002XX | Armored Fiber With FC/PC Connectors 200um Core Multimode 2m length Full Details: www.laserglow.com/AFF | |
|  ACALBNWXX | Carrying Case-104 Holds Lab/OEM N or W size Standard/Labspec laser Full Details: www.laserglow.com/ACA | Included With Laser |

FOR MORE INFORMATION PLEASE CONTACT:

LASERGLOW TECHNOLOGIES
873 St. Clair Ave West, Toronto, ON, Canada M6C1C4
Tel. (416) 729-7976 Fax (480) 247-4864
sales@laserglow.com www.laserglow.com

E&OE: Data included in this sheet may be subject to change without notice.

Please confirm critical specifications with our staff prior to ordering.